

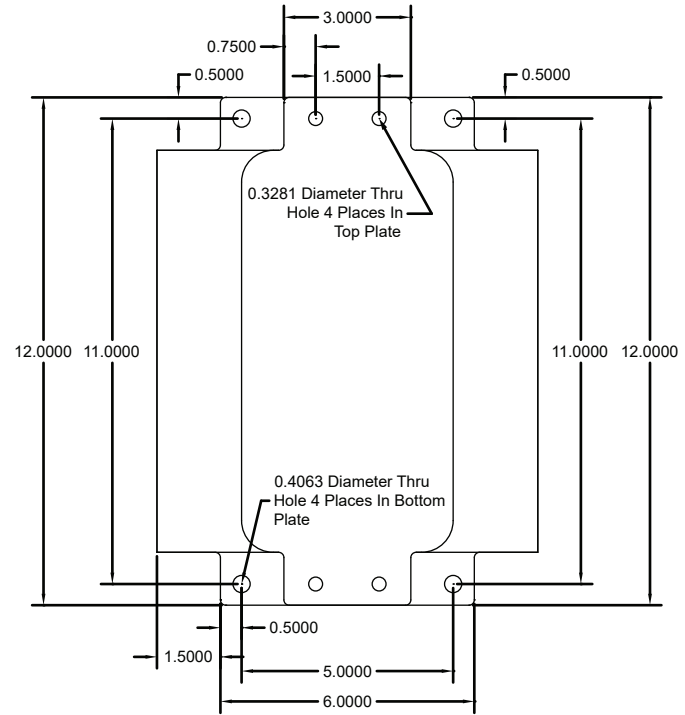


Operating Pressure	0-80 PSI
Air Consumption	2.05 CFM @ 120 Cycle/Minute
Air Requirements	Dry Filtered Air
Operating Temperature	0-120 Degree Fahrenheit
Push Force	1000 LB @ 80 PSI
Stroke Length	1.25"
Conveying Speed	12.50 Feet/Minute Average
Tray Weight Capacity	250 LB
Material Weight Capacity	500 LB
Cross Bar Length	144.00" Centered
Drive Height	7.25"
Drive Width	12.00"
Drive Length	9.00"
Drive Weight	83 LB

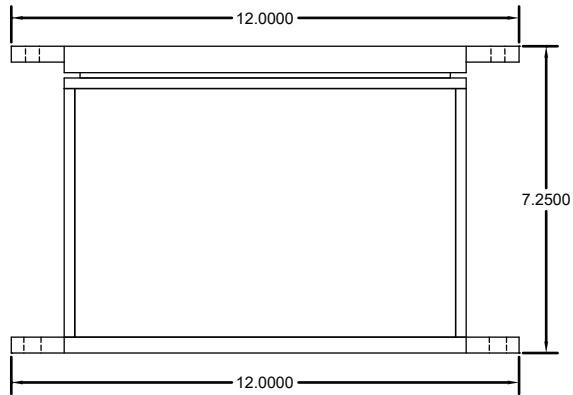

Direction Of Material Movement ( 1.25" Total Stroke )

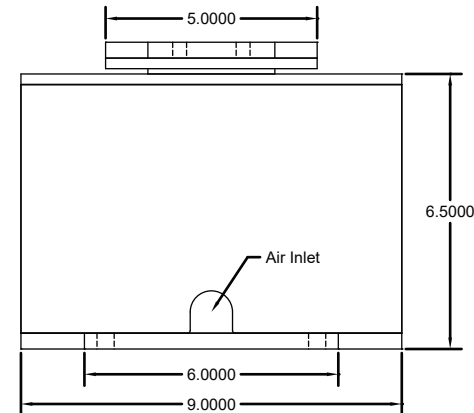

Pneumatic Innovations LLC

Shuttle Pro-1000 Compact Pneumatic Conveyor Drive  
General Information Drawing