

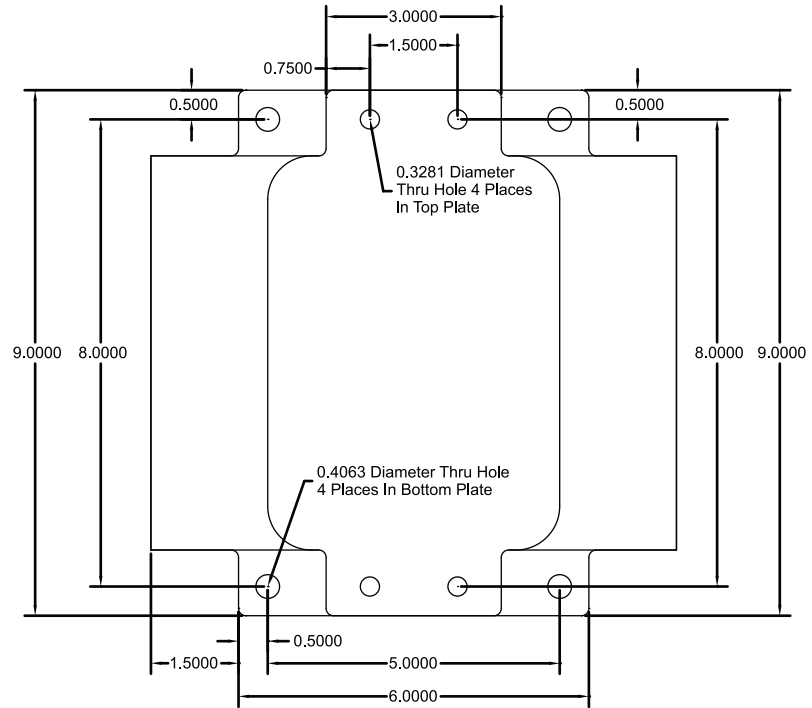


Operating Pressure	0-80 PSI
Air Consumption	0.62 CFM @ 120 Cycle/Minute
Air Requirements	Dry Filtered Air
Operating Temperature	0-120 Degree Fahrenheit
Push Force	250 LB @ 80 PSI
Stroke Length	1.25"
Conveying Speed	12.50 Feet/Minute Average
Tray Weight Capacity	62.50 LB
Material Weight Capacity	125 LB
Cross Bar Length	48.00" Maximum Centered
Drive Height	5.00"
Drive Width	9.00"
Drive Length	9.00"
Drive Weight	42 LB

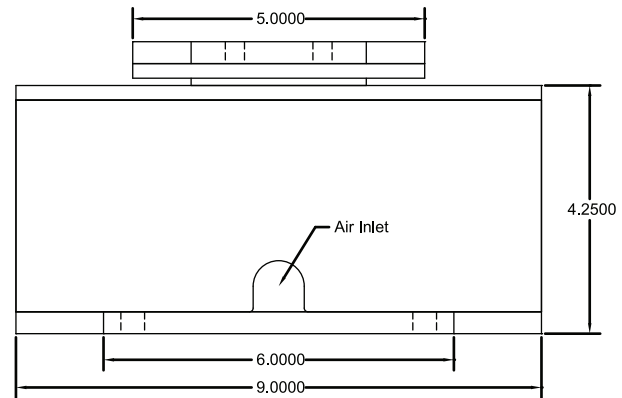

Direction Of Material Travel ( 1.25" Total Stroke )

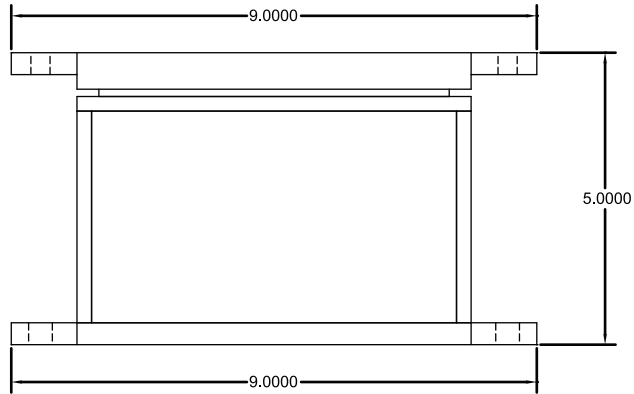

**Pneumatic Innovations LLC**

Shuttle Pro-250 Compact Pneumatic Conveyor Drive  
General Information Drawing